

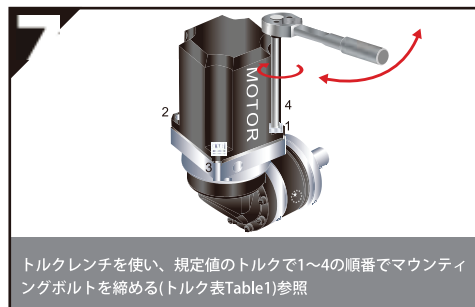
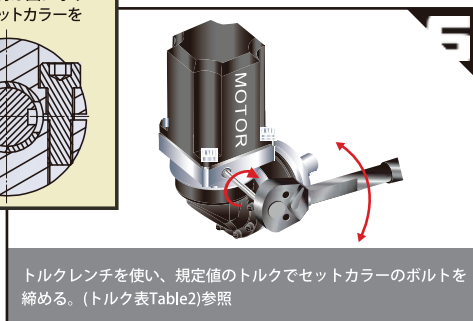
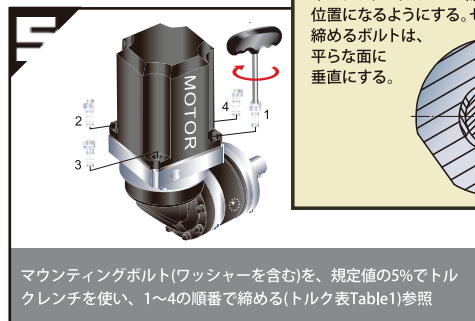


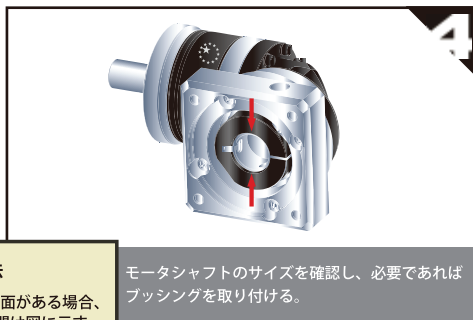

モータ取り付け説明書 (P2Rシリーズ)

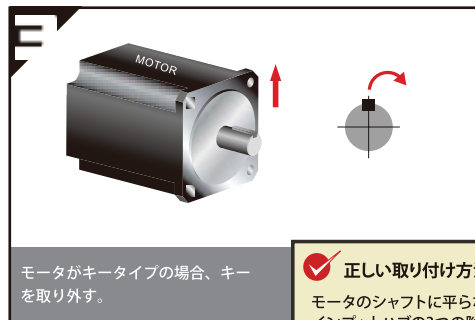

[P2Rシリーズ]

Table1 モータマウンティング トルク表

ボルトサイズ	フラット幅	強度8.8トルク数値		強度10.9トルク数値	
	[mm]	[Nm]	[In-lbs]	[Nm]	[In-lbs]
M3 x 0.5P	2.5	1.3	12	1.8	16
M4 x 0.7P	3	3	27	4.1	37
M5 x 0.8P	4	6.1	55	8.2	73
M6 x 1P	5	11	98	14	124
M8 x 1.25P	6	25	222	34	302
M10 x 1.5P	8	49	434	67	594
M12 x 1.75P	10	85	753	116	1028
M14 x 2P	12	137	1214	186	1648
M16 x 2P	14	210	1860	286	2534

Table2 セットカラーボルト トルク表

ギアボックスサイズ	モータシャフト直径	ボルトサイズ	フラット幅	トルク数値	
	[mm]			[Nm]	[In-lbs]
PE2R_050 PA2R_042 PG2R_040 PN2R_017 PS2R_A	C3 ≤ 8	M5 x 0.8P x 16L	4	9.8	87
	C3 ≤ 11	M5 x 0.8P x 16L	4	9.8	87
	C3 ≤ 14	M5 x 0.8P x 16L	4	9.8	87
	C3 ≤ 8	M5 x 0.8P x 16L	4	9.8	87
PE2R_070 PA2R_060 PG2R_060 PN2R_023 PS2R_B	C3 ≤ 11	M5 x 0.8P x 16L	4	9.8	87
	C3 ≤ 14	M5 x 0.8P x 16L	4	9.8	87
	C3 ≤ 19	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 14	M5 x 0.8P x 16L	4	9.8	87
PE2R_090 PA2R_090 PG2R_080 PN2R_034 PS2R_C	C3 ≤ 19	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 24	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 28	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 19	M8 x 1.25P x 25L	6	41	364
PE2R_120 PA2R_115 PG2R_120 PN2R_042 PS2R_D	C3 ≤ 24	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 28	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 32	M10 x 1.5P x 30L	8	80	709
	C3 ≤ 35	M10 x 1.5P x 30L	8	80	709
PE2R_155 PA2R_142 PG2R_160 PN2R_056 PS2R_E	C3 ≤ 38	M10 x 1.5P x 30L	8	80	709
	C3 ≤ 42	M12 x 1.75P x 35L	10	139	1232
	C3 ≤ 28	M8 x 1.25P x 25L	6	41	364
	C3 ≤ 32	M10 x 1.5P x 30L	8	80	709

*ホールディングトルク数値は、上記数値を最小値とし、最大値は上記数値の120%以下としてください。

